POWERHOUSE

Home Energy Systems

Electrical Characteristics

PANEL SPECIFICATIONS	
Power Output(Watt)-	415 Watts
Power Tolerance-	+5/0%
Panel Efficiency-	21.9%
Maximum Degredation(Annually)-	.25%
Nominal Power(in 25 Years)-	92.0%
Product Warranty(Manufacturer)-	40 Year
Power Warranty(Manufacturer)-	40 Year
All Black Monocrystalline Panels	

INVERTER SPECIFICATIONS	
Peak Output Power(volt-Amps)-	366 VA
Input Power-	295 - 500 W
Maximum continuous output power(volt-Amps)-	349 VA
Operating range(Voltage)-	16 - 58 V
Warranty-	25 Year
Optimized for the latest high-powered PV modules	

System Enhancers

POWERHOUSE CHARGING	
PowerCharge 40	Inquire for more information
PowerCharge 60	Inquire for more information
PowerCharge 80	Inquire for more information
POWERHOUSE STORAGE	
Small Pack	Inquire for more information
Smart Pack	Inquire for more information
Super Pack	Inquire for more information







Racking Characteristics

PHYSICAL SPECIFICATIONS


Mount-

RACKING SPECIFICATIONS	
Spanning Capability-	6 Inches
Finish-	Anodized Black Finish
Wire Visibility-	Wire Management Tray

Mechanical Characteristics

Format-	71.3 in \times 41.18 in \times 1.57 in (including frame)
Weight-	46.7 lbs (21.2 kg)
Frame-	Class 1 Black Anodized

Halo UltraGrip Black

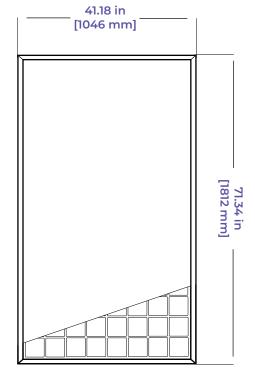

46.7 lbs (21.2 kg)





















